


		Dimension
A	PCB Thickness	Minimum 1.4 mm
B	Plated Through Hole Diameter	0.60 +/- 0.05 mm
C	Drill Hole Diameter	0.70 +/- 0.02 mm
D	Cu Thickness	Minimum 25μm
E	Plating Thickness	(Minimum 0.5μm Immersion Sn)

7 PLATED THROUGH-HOLE DIMENSIONS



7 PLATED THROUGH-HOLE CROSS SECTION (SCALE 10:1)

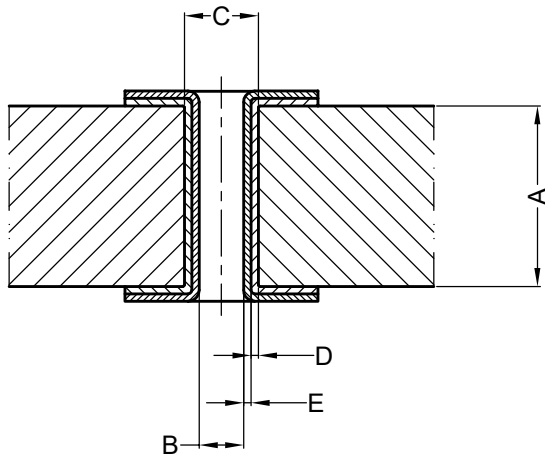

D	ECN-20043 UPDATE DWG.	2021/06/21
C	ECR-19066	2019/06/26
B	ECN-100307	2009/11/18
REV.	DESCRIPTION	DATE

UNITS: ■ mm □ inch		SIZE	NAME: MicroTCA Power Connector Module Version		nexttron NEXTRONICS ENGINEERING CORP.			
		A3						
GENERAL TOLERANCE: (UNLESS SPECIFIED)			PART NO: R-819B8113M0010-0		TITLE: CUSTOMER DWG			
	mm	inch	APPD: Linson曾偉雄 2021/06/21		DWG NO:			C
4 PLACE	± **	±. **	CHKD: Linson曾偉雄 2021/06/21					
3 PLACE	± **	±. **	DRAW:		010-0000-518			
2 PLACE	± 0.15	±. **						
1 PLACE	± 0.30	±. **	DESIGN: Gavin王士文 2021/06/21			SCALE	SHEET	REV.
ANGLES	X° ±2°					1/1	2/2	D