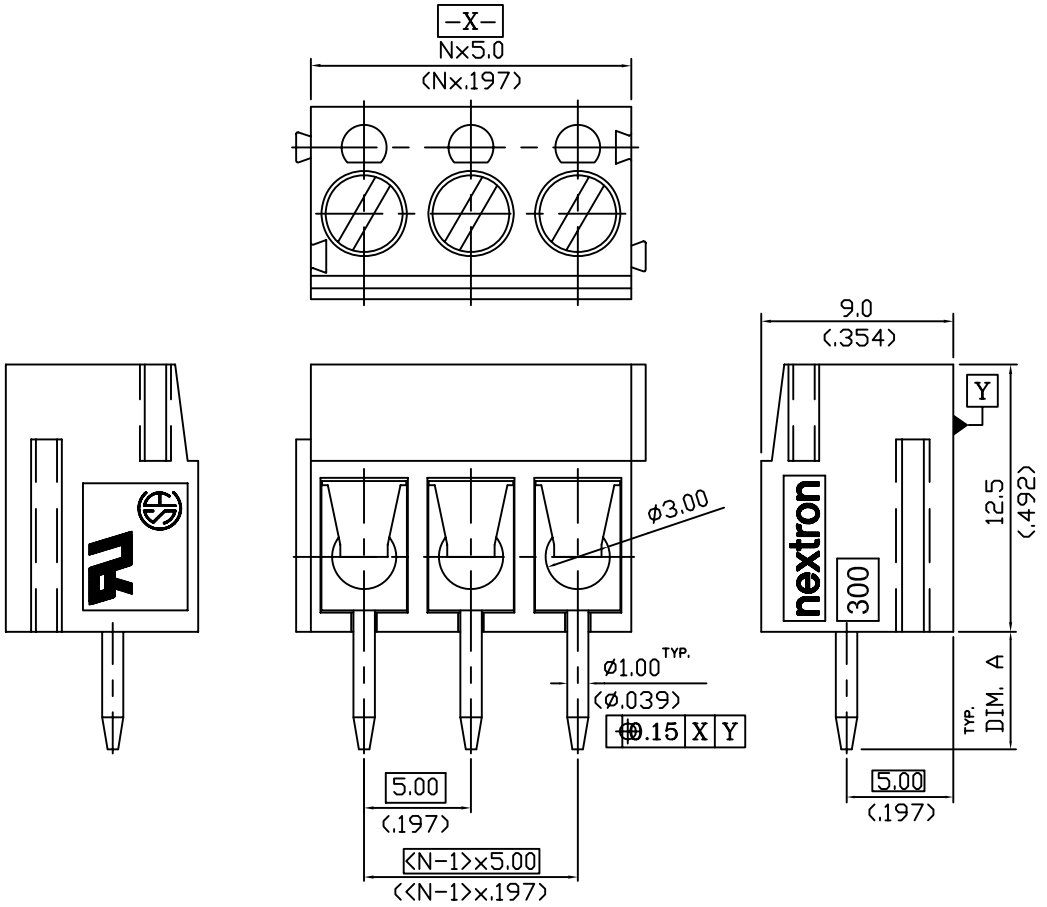

NOTES:

1. ALL DIMENSIONS ARE IN MMS, WITH INCH IN PARENTHESIS.
2. RECOMMENDED PC-BOARD-HOLDS DIAMETER:ø1.20mm TO 1.40mm; (ø.047" to ø.055")
3. "N"=NUMBER OF CONTACTS.
4. MATERIAL:
   A. HOUSING: NYLON.
   B. METAL PART: BRASS ,PLATING:Tin.
   C. MATEL PLATE: STAINLESS STEEL.
   D. SCREW: STELL, PLATING:ZINC
5. WIRE RANGE: 14-22 AWG.
6. ROHS Directive compliance. (Lead-Free)Wave solder capable to 260°C,10sec±0.5sec.

PITCH	5.00mm (.197")	10.00mm (.394")
MODEL:	*-300-**1-***,..	*-300-**2-***,..
DWG:		

X - 300 - XXX - 1XX1 - X0X0

ROHS

Definition	Code
ROHS	R
NO ROHS	BLANK

Number of contacts

Definition	Code
2 contacts(standard)	02
3 contacts(basic blocks)	03

(2 and 3 blocks are the standard versions with multiples thereof available) etc.

Pitch (Pin Spacing)

Definition	Code
5.00mm/.197"	1
10.00mm/.394"	2

Color

Definition	Code
Block	0
Blue	6
Grey	8

LOGO

Definition	Code
No Logo	0
NEXTRON	2

PIN LENGTH

Definition	Code
3.50mm	2
4.50mm	3

Screw Type

Definition	Code
"-"	0
"+"	1

4.5mm
3.5mm
DIM.A

REV.	ECN. NO.	DESCRIPTION	DATE	DRAWN	APPD

DESIGN UNITS ■ mm ■ INCH

GENERAL TOLERANCES: (UNLESS SPECIFIED)

	mm	INCH
4 PLACE	± * *	±. * *
3 PLACE	± * *	±. * *
2 PLACE	± 0.20	±. * *
1 PLACE	± 0.30	±. * *
ANGULAR:	X°± * *	X°± * *

NAME: NEXTRON (300) 5.0mm Pitch T/B

PART NO: SEE TABLE

APPD: Alan Su 5/26.06

CHKD: 羅旋 5/26.06

DRAWN: 肖海洋 5/26.06

NEXTRONICS ENGINEERING CORP.

TITLE: ASSEMBLY DWG. C

DWG. NO: 010-0000-056

SCALE:	SHEET:	REV.:
4 / 1	1 /1	B

A4

NPF-RD40040